


INSTALLATION INSTRUCTIONS FOR NON STANDARD SETS

For Fixed Top Blade applications when in between standard heights are necessary.

Louvre Sets are supplied with 'Floating Top Clips' (FTC) which allow for being cut down to required height and the clip/blade can be fixed in position.




A. Blade Retainer - 6mm Glass or Aluminium Blade

Cut the Blade Retainer to length - jamb to jamb size less 89mm.

B. Blade Retainer - 13mm Timber Blade

Cut the Blade Retainer to length - jamb to jamb size less 104mm.

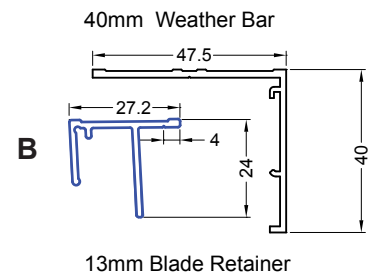

C. Cut blade width **less an additional 5mm** to allow clearance for Blade Retainer height fitment.


D. Open both Cut Down Clips and **install Blade** into position carefully.

Then slide Blade Retainer over top Blade edge and as far as possible downwards.


Open the operable Louvre Blades and close firmly then swivel the Blade with Retainer into the vertical position.

E. Push the Blade Retainer up to the window frame head (or Weather Bar if fitted) and ensure it aligns with the 'closed' position on the operable side of the Louvre Set.

Screw the Blade Retainer to the Frame with 3-6 screws depending upon length.

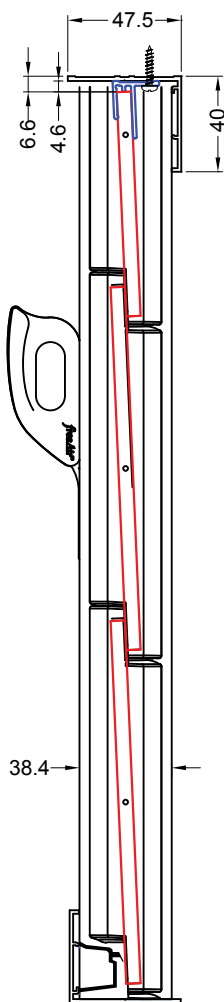

Cut Down Clip with Retainer Fitted

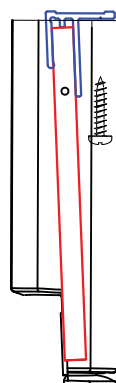

Cut down Clip with Retainer fitted

